



Display Solutions

XD210U / XD211U

crystal clear
display solutions



Entry level, high performing projectors
for business and education

New DLP™ chip, high brightness and lightweight

The XD210U / XD211U combine the features of an advanced DLP™ (Digital Light Processing) chip, a newly developed optical engine and a high-efficiency 180W light source lamp to produce an incredible picture with rich and vibrant colours. Additionally with its compact and lightweight design, these new models are easy to move around, with quick setups for presentations on the go.

Detachable Keypad

The keypad* can be removed from the projector to be used as a remote control. Since the keypad is used to control the projector, detaching it also doubles as a key-lock function preventing others from making adjustments and helps discourage theft.

* An extra remote keypad is included with the XD210U / XD211U should the original keypad get lost.

2000 ANSI LUMENS – XD210U
2200 ANSI LUMENS – XD211U
2000:1 CONTRAST RATIO



Filter Free Design

The filter free design reduces the risk of dust and dirt particles entering the projector, helping to reduce any maintenance issues for added peace of mind.

Easy Setup

The Auto Search function displays the connected input sources automatically. Users don't have to get distracted by ensuring the appropriate source is manually selected.

Also, +/-20 steps of vertical keystone correction and 1.2x optical zoom gives users a greater flexibility of positioning.

Instant Shutdown

Once your presentation is over, you can simply hit the power button, disconnect the XD210U / XD211U and go off to your next task, the instant shutdown feature makes it quick and safe to power down the projector.



XD210U (XGA Projector)


XD211U (XGA Projector)

Specifications

Model	XD210U	XD211U
Display Technology	0.55" 1 - Chip DMD	
Resolution	1024 x 768 (Total 786,432 pixels)	
Brightness	2000lm	2200lm
Contrast Ratio	2000 : 1	
Picture Size	30" - 250"	40" - 300"
Projection Lens	f=22.0 ~24.2 mm, F=2.5-2.7, (3.9-4.4m@100")	f=19.9 ~23.9 mm, F=2.5-2.7, (3.6-4.4m@100")
Source Lamp	150W (life up to 3000hrs) with Low Mode, 180W (life up to 2000hrs) with Standard Mode	
PC Compatibility	640 x 480-1280 x 1024 True : 1024 x 768 Sync on Green available	
Video Compatibility	NTSC / NTSC 4.43 / PAL (including PAL - M, N) / SECAM / PAL - 60 Component Video ; 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i 60Hz), 1080i (1125i 50Hz)	
PC Input Terminals	RGB ; mini D-sub 15 Pin x 1 Audio ; Stereo mini jack (ø3.5mm) x 1	
Video Input Terminal	RCA x 1	
Communication Terminal	RS-232C x 1	
Audio Speaker	2W Mono	
Dimensions (W x H x D)	302 x 105 x 221 mm / 11.9 x 4.1 x 8.7 inch	
Weight	2.7kg / 6.0lbs	
Power requirements	AC 100 - 240V, 50 / 60Hz	
Optional Lamp	VLT-XD210LP	


*All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

Input and Output Terminals

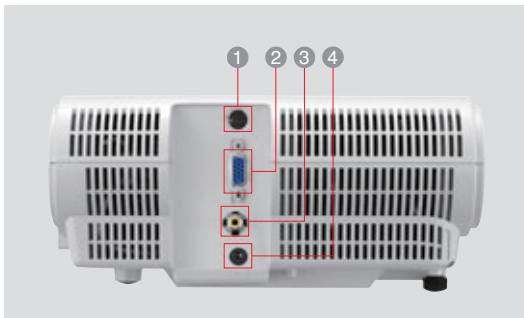


- 1 Serial RS-232C
- 2 PC/Component Video input (mini D-sub 15pin)
- 3 RCA
- 4 Audio input (stereo mini jack)

Dimensions

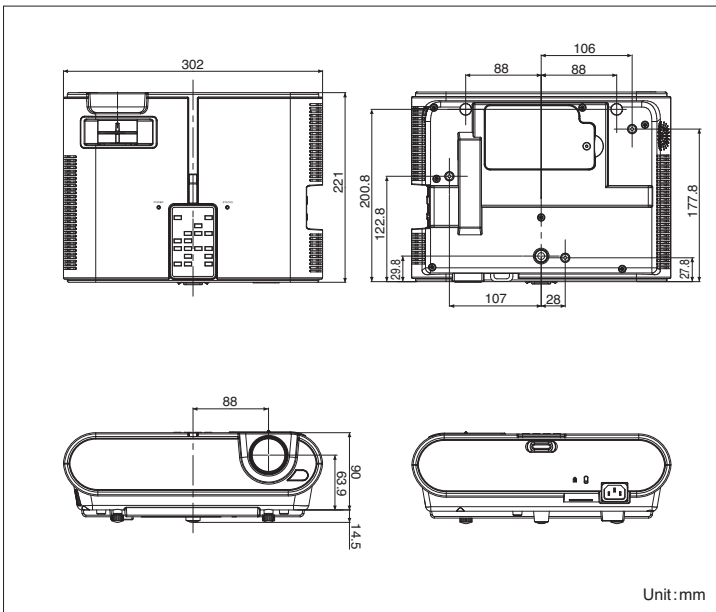

Screen size and Projection distance

As seen from the side

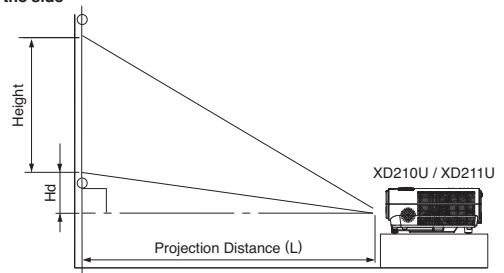

Screen size chart (4:3 aspect ratio)

Screen		Distance from screen (L)				Height projected image (Hd)				
Diagonal size	Width (W)	Height (H)	Shortest (Wide)	Longest (Tele)						
inch	cm	inch	cm	inch	m	inch	cm			
40	102	32	81	24	61	1.5	68	1.7	1.8	5
60	152	48	122	36	91	2.3	103	2.6	2.7	7
80	203	64	163	48	122	3.1	138	3.5	3.6	9
100	254	80	203	60	152	3.9	173	4.4	4.5	11
150	381	120	305	90	229	5.9	260	6.6	6.8	17
200	508	160	406	120	305	7.9	347	8.8	9.0	23
250	635	200	508	150	381	9.9	434	11.0	11.3	29
300	762	240	610	180	457	11.9	-	-	13.5	34

The above numbers are approximate, and may be slightly different from the actual measurements.

Screen size chart (16:9 aspect ratio)

Screen		Distance from screen (L)				Height projected image (Hd)					
Diagonal size	Width (W)	Height (H)	Shortest (Wide)	Longest (Tele)							
inch	cm	inch	cm	inch	m	inch	cm				
40	102	35	89	20	50	66	1.7	74	1.9	5.2	13
60	152	52	133	29	75	100	2.6	112	2.8	7.9	20
80	203	70	177	39	100	135	3.4	150	3.8	10.5	27
100	254	87	221	49	125	169	4.3	188	4.8	13.1	33
150	381	131	332	74	187	254	6.4	283	7.2	19.6	50
200	508	174	443	98	249	339	8.6	378	9.6	26.2	66
250	635	218	553	123	311	424	10.8	473	12.0	32.7	83
300	762	261	664	147	374	509	12.9	-	-	39.3	100

The above numbers are approximate, and may be slightly different from the actual measurements.



New publication, effective May 2008 Specifications subject to change without notice.